


# HELIX™ DIMMABLE

**ANALOG DIMMING™**  
10%  100%  
**HIGH POWER FACTOR**

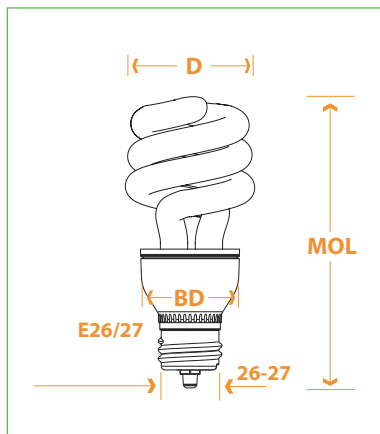

## Technical Data: HELIX™ ANALOG DIMMING™

HELIX™ Electronic, HPF, Medium Base (E26/27), 120VAC- 50/60Hz, 8,000 Hours Average Life												Incandescent Equivalent			
Item Number	Watts	Input Line Current At Full Power	Max Line Current When Dimming	Power Factor	THD	M.O.L. (Inch)	D (Inch)	BD (Inch)	Color Temp. (°K)	CRI	Lumens	Lm/W	Watts	Lumens	Lm/W
24514-ADIM*	14	0.130 A	0.260 A	>0.70	<40%	4.625	1.750	1.73	2700	>82	800	57	60	900	15
24518-ADIM*	18	0.170 A	0.340 A	>0.70	<40%	4.875	2.000	1.73	2700	>82	1100	61	75	1150	15
24524-ADIM*	24	0.220 A	0.440 A	>0.70	<40%	4.750	2.375	1.73	2700	>82	1500	63	100	1500	15

APPLICATION INFORMATION: TO BE USED WITH TABLE LAMPS • PENDANT LAMPS • DESK LAMPS • TRACK LIGHTS • RECESSED CANS • WARDROBE CLOSETS • OPEN & TOTALLY ENCLOSED FIXTURES • USE WITH OCCUPANCY SENSORS MADE BY NEPTUN • AND ANY DIMMER MADE AFTER 1995

## Technical Data: NEPTUN® DIMMERS - PHASE-CUT

Item Number*	Description	Watts MAX.	Voltage	Line Current MAX.	Colors Available
80002-xx	Push-Button - Programmable	600	120 VAC	10 A	Pearl White (PW), Ivory (IV), Black (BK), Brown (BR)
80003-xx	IR Push-Button - Programmable	600	120 VAC	10 A	Pearl White (PW), Ivory (IV), Black (BK), Brown (BR)
80004-xx	Push-Button - Manual	600	120 VAC	10 A	Pearl White (PW), Ivory (IV), Black (BK), Brown (BR)
80005-xx	Slide-Pot - Manual	600	120 VAC	10 A	Pearl White (PW), Ivory (IV), Black (BK), Brown (BR)

\* xx refers to color code

## Features and Benefits

- \* DIMMABLE in range of 100% - 10% using ordinary dimmers
- \* New! Patented flicker-free ANALOG DIMMING™ system
- \* Reliable start at the lowest setting
- \* Color Temperature of 2700°K - Matching incandescent bulbs
- \* High Luminous Efficacy: Up to 63 Lm/W
- \* New! Patented Amalgam Technology
- \* Superior Lumen Maintenance of 85% after 3200 hours of use

NEPTUN LIGHT, Inc.  
service@neptunlight.com  
Tel. 1-847-735-8330  
Toll Free: 1-888-735-8330



© Copyright 2008 NEPTUN LIGHT, Inc.



(\*) Certified Models